

TOPVERT E1 Series

High performance general purpose compact drive
Sensorless Vector Control
Output frequency: 0.1-600Hz

1-Phase, 90~132VAC, 0.2kW~1.5kW
1-phase, 180~264VAC, 0.4kW~2.2kW
3-phase, 180~264VAC, 0.4kW~7.5kW
3-phase, 342~528VAC, 0.75kW~7.5kW

**TOPVERT G1 series**

High performance general purpose multi-function drive
Sensorless Vector Control,
output frequency: 0.1-600Hz

1-phase, 180~264VAC, 0.4kW~2.2kW
3-phase, 180~264VAC, 0.4kW~75kW
3-phase, 342~528VAC, 0.75kW~315kW

**TOPVERT H1 series**

High performance multi-function high speed drive
Sensorless Vector Control
output frequency: 0.1-6000Hz

1-phase, 180~264VAC, 0.4kW~2.2kW
3-phase, 180~264VAC, 0.4kW~75kW
3-phase, 342~528VAC, 0.75kW~75kW

**TOPVERT P1 series**

High performance multi-function variable torque drive
for Fan & Pump
Sensorless Vector Control
output frequency: 0.1-600Hz

3-phase, 180~264VAC, 0.75kW~90kW
3-phase, 342~528VAC, 1.5kW~400kW



**TOPVERT S1 series**

High performance general purpose micro drive
Sensorless Vector Control
Output frequency : 0.1-600Hz



1-Phase, 90~132VAC, 0.2kW~0.75kW
1-phase, 180~264VAC, 0.4kW~2.2kW
3-phase, 180~264VAC, 0.4kW~3.7kW
3-phase, 342~528VAC, 0.4kW~3.7kW




Options

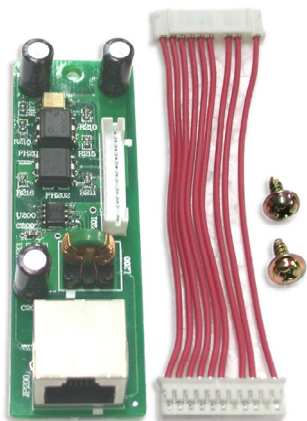

TMCA-E01
RS-485 Serial port option kit

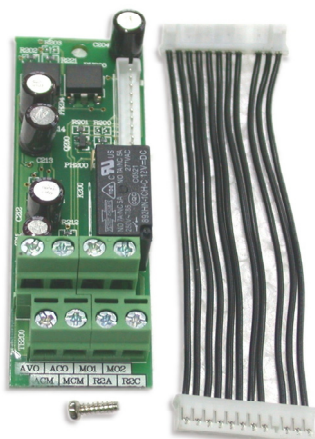

TMCA-E20
Output terminals expansion card option kit



PU-02
Keypad (with COPY function)

